


Classic : 1030-SPU

Product
Specification

(10mm x 300mm)

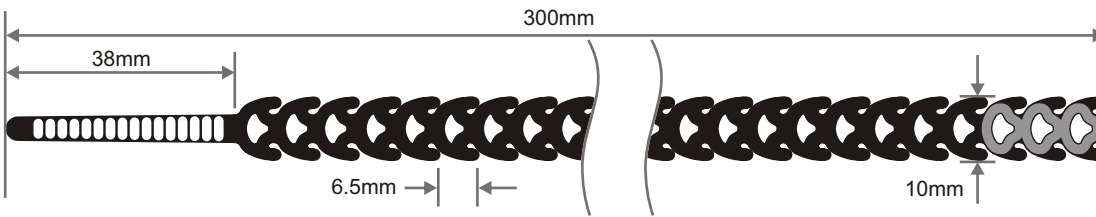

Properties

General

Product Code [model number]:	1030
Standard Pack Sizes:	Trade bags of 48. Retail bags of 24. Bulk box of 6,000
Standard Colours:	Black, natural, green
Notes:	Other colours may be available subject to minimum order Supplied in tear-off sheets of 6 rapstraps

Physical

Nominal Moulded Length:	300mm (12")
Width:	10.0mm (0.4")
Thickness:	1.25mm (0.05")
Weight:	3g approx.
Apertures:	40
Maximum Fitted Bundle Size:	> 120mm (5") diameter
Minimum Fitted Bundle Size:	< 5mm (0.2") diameter
Average uses per Strap:	3-5 (@20-40mm diameter)
Recommended maximum loading when looped:	12Kg
Recommended maximum stretch:	+50%

Material

Material:	Polyurethane Elastomer [Soft durometer, 90A]
Density:	1230Kg/m ³ [approx.]
Maximum Tensile Strength:	50MPa (Elastic limit yield at 8MPa)
Flexural Modulus:	0.05GPa [approx.]
Resistance to Fuels and Oils:	Good to Excellent

Thermal

Low Temperature Brittle Point:	-68°C (-90°F)
Minimum Installation Temp:	+10°C
Recommended Service Temp Range [no load]:	-20°C to +60°C (-4°F to +140°F)
Recommended Ambient Temp:	15°C to 28°C
Recommended Ambient Humidity:	40-60% RH
Short Temp Peak Temp Range [no load]:	-30°C to +80°C (-22°F to +176°F)

Flame & UV

Flammability UL94 Flame Class:	1.5mm (0.06") Thickness, Class HB
UV Properties:	Some loss of physical properties & discolouration may occur after prolonged outdoor exposure

All data provided for representation only. E&OE.

Rapstrap®
Thousands of uses. Only one rapstrap.

Rapstrap Ltd., Expo House, Mead Lane, Hertford, Hertfordshire SG13 7AP, UK
e: enquiries@rapstrap.com www.rapstrap.com

Registered Office: Rapstrap Limited, Five Ways, 57/59 Hatfield Road, Potters Bar, Herts, EN8 1HS, UK. Registered in England & Wales Company No. 05861045

21.61